

# EPIC<sup>®</sup>

---

## FIRE TUBE

**HIGH EFFICIENCY  
CONDENSING BOILERS**

4 WALL MOUNT MODELS FROM  
80,000 TO 199,000 BTU/HR

95% AFUE

10:1 TURNDOWN RATIO

EASY INSTALLATION AND SERVICEABILITY

FEATURES  **SMART CONTROL**<sup>™</sup>  
OPERATING CONTROL



# STEP UP WITH EPIC



# LOCHINVAR'S EPIC® RESIDENTIAL BOILER

With the EPIC fire-tube boiler, Lochinvar now offers one of the broadest lines of residential condensing boiler products in the industry. The EPIC boiler delivers performance far beyond other value-priced residential boilers in its class. It touts several of the industry-leading features first pioneered by Lochinvar's KNIGHT boiler—the top-selling residential boiler since 2005 and still the leading premium solution in hydronic heating.



## VALUE PRICED AT THE TOP OF ITS CLASS

Step up from a traditional cast iron boiler to a high efficiency design with the EPIC. It comes with many standard features, including a Universal Vent Connector—a multi-material connector that allows for PVC, CPVC, polypropylene and stainless-steel connections directly into the unit. It also offers a 10:1 turndown ratio, a built-in cascading sequencer for up to eight units, and Lochinvar's revered SMART CONTROL™ system, the gold standard for boiler control systems that includes an intuitive setup wizard and text-based display.

## COMPETITIVE COMPARISON

COMPETITION	DISPLAY	HEAT EXCHANGER	VENT CONNECTOR	MODULATION TURNDOWN	DESIGNED, ENGINEERED AND ASSEMBLED IN THE USA
<b>EPIC®</b> FIRE TUBE	ENGLISH	FIRE TUBE HEAT EXCHANGER	UNIVERSAL VENT CONNECTOR	10:1	YES
<b>BRAND B</b>	CODES	WATER TUBE HEAT EXCHANGER	VENT ADAPTERS NEEDED	5:1	YES
<b>BRAND N</b>	CODES	WATER TUBE HEAT EXCHANGER	VENT ADAPTERS NEEDED	UP TO 15:1	NO
<b>BRAND V</b>	CODES	WATER TUBE HEAT EXCHANGER	VENT ADAPTERS NEEDED	LESS THAN 6:1	NO

# EPIC<sup>®</sup>

## FIRE TUBE



## EPIC FEATURES

### 1 UNIVERSAL VENT CONNECTOR

Multi-material connector allows either PVC, CPVC, polypropylene or stainless steel connection directly to the appliance without adapters. EPIC also has a built-in combustion analyzer port.

### 2 DIRECT VENTING UP TO 100 FEET

Offers five venting options for tremendous installation flexibility. It permits direct-vent air intake and exhaust runs up to 100 equivalent feet using either PVC, CPVC, polypropylene or AL29-4C stainless steel vent pipe.

### 3 ADVANCED NEGATIVE REGULATION TECHNOLOGY

Safely and reliably operates with supply gas pressure as low as 4 inches water column. Its negative regulation (neg/reg) technology eliminates mechanical dampers as it automatically adjusts fan speed to ensure the correct volume and mix of fuel and air throughout the firing range.

### 4 FIRE-TUBE HEAT EXCHANGER

Low pressure drop saves on pump operation costs and provides installation flexibility, while stainless steel fights off corrosion.




## ALWAYS LEADING THE CHARGE

The EPIC residential boiler is the perfect hydronic heating solution for homeowners seeking the reliability, ease of installation, and engineering prowess of a Lochinvar high efficiency product. The EPIC boiler is available in four sizes: the EPB080N with max input of 80,000 BTU/hr, the NKB110N with max input of 110,000 BTU/hr, the RPB150N with max input of 150,000 BTU/hr and the EPB199N with a max input of 199,000 BTU/hr.

The EPIC boiler was designed for durability with 95% AFUE efficiency, a fire-tube stainless steel heat exchanger, and a 10/5 (heat exchanger/parts) warranty. The EPIC boiler is also engineered with installation and serviceability in mind, including a simple layout and construction as well as technical support from Lochinvar professionals.

EPIC BOILER DIMENSIONS AND SPECIFICATIONS

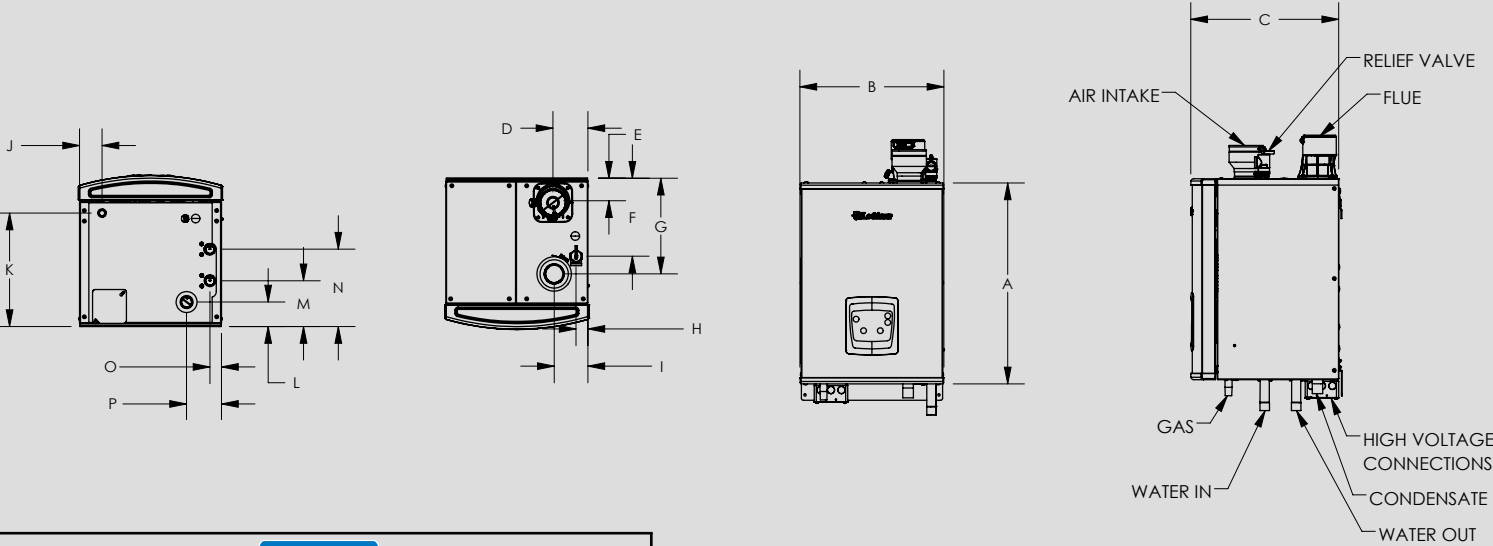

EPIC BOILER						AHRF CERTIFIED							
Input MBH													
Model Number	Max	Min	AFUE%	Heating Capacity MBH	Net AHRI Rating MBH	A	B	C	D	E	F	G	H
EPB080N	80	8.3	95.0	74	64	24"	17-1/4"	17-1/4"	2-1/4"	5-1/8"	8-1/2"	5-1/8"	1-1/2"
EPB110N	110	11	95.0	102	89	24"	17-1/4"	18"	2-3/4"	2-7/8"	9"	5-1/2"	2-7/8"
EPB150N	150	15.0	95.0	139	125	24"	17-1/4"	18"	4-1/2"	2-3/4"	9-1/8"	11-3/4"	4-1/2"
EPB199N	199.9	19.9	95.0	185	161	24"	17-1/4"	18"	4-1/8"	2-3/4"	9-3/8"	11-1/2"	4"

Model Number	I	J	K	L	M	N	O	P	Gas Conn.	Water Conn.	Air Inlet	Vent Size	Shipping Wt. (lbs.)
EPB080N	1-1/2"	6-3/8"	12-5/8"	5-1/8"	4-5/8"	8-1/2"	1-1/2"	14-3/4"	1/2"	1"	2"	2"	120
EPB110N	2-7/8"	7-3/4"	13-1/8"	2-7/8"	5-1/2"	9"	2"	14-1/4"	1/2"	1"	3"	3"	126
EPB150N	4-1/2"	2-7/8"	13-1/8"	3"	5-3/8"	9-1/8"	1-7/8"	4-5/8"	1/2"	1"	3"	3"	132
EPB199N	4"	2-3/4"	13-1/2"	2-7/8"	5-1/2"	9-1/4"	1-3/8"	1-3/8"	1/2"	1"	3"	3"	140

Information subject to change without notice. Change "N" to "L" for LP gas models. The Net AHRI Water Ratings shown are based on a piping and pickup allowance of 1.15. Lochinvar should be consulted before selecting a boiler for installations having unusual piping and pickup requirements, such as intermittent system operation, extensive piping systems, etc. The ratings have been determined under the provisions governing forced draft burners.

SMART CONTROL™ FUNCTIONS AND FEATURES

SMART CONTROL™ FEATURES

- ▶ SMART CONTROL Digital Operating Control  
LCD Display with words not codes
- ▶ Outdoor Reset Control with Outdoor Air Sensor
- ▶ Domestic Hot Water Prioritization  
Separately Adjustable Space Heat/DHW Switching Times
- ▶ Programmable System Efficiency Optimizers  
Space Heating Max Rate Limiting  
Anti Cycling  
Outdoor Air Reset Curve
- ▶ Three Pump Control  
System Pump  
Boiler Pump  
DHW Pump
- ▶ High-Voltage Junction Box  
120 VAC / 60 Hertz / 1 Phase Power Supply
- ▶ Low Voltage Terminal Strip  
Flow Switch Contacts  
Tank Sensor Contacts  
SH Thermostat Contacts  
DHW Thermostat Contacts  
Low-Water Cutoff Connection  
System Sensor Contacts  
Outdoor Air Sensor Contacts  
Cascade Contacts

- ▶ Time Clock for Data Logging  
Last 10 Lockouts
- ▶ Low-Water Flow Safety Control & Indication
- ▶ Password Security
- ▶ Built-in Cascading Sequencer for up to 8 units  
Multiple Size Boiler Cascade

STANDARD FEATURES

- ▶ Modulating Burner with 10:1 Turndown  
Direct-Spark Ignition  
Low-NOx Operation
- ▶ ASME Stainless Steel Heat Exchanger
- ▶ Vertical & Horizontal Direct-Vent  
PVC, CPVC, Polypropylene or SS Venting  
up to 100 feet
- ▶ Condensate Trap
- ▶ California Code Compliant
- ▶ Other Features  
Automatic Reset High Limit  
Adjustable High Limit w/Manual Reset  
Wall-Mount Bracket  
Zero Clearances to Combustible Materials  
10-Year HEX Warranty (See Warranty for Details)  
5-Year Parts Warranty

OPTIONAL EQUIPMENT

- Low-Water Cutoff w/Manual Reset & Test
- Concentric Vent Kit
- Condensate Neutralization Kit
- Sidewall Vent Termination
- Floor Stand
- Wireless Outdoor Sensor
- Natural to LP Gas Conversion Kit



Lochinvar, LLC  
300 Maddox Simpson Parkway  
Lebanon, Tennessee 37090  
P: 615.889.8900 / F: 615.547.1000  
f in y+ Lochinvar.com



iPhone and iPod touch are trademarks of Apple Inc., registered in the U.S. and other countries. Android and Google are trademarks of Google Inc., registered in the U.S. and other countries. App Store is a service mark of Apple Inc. Google Play is a service mark of Google Inc.